

Compatibility

- Windows 7 & 8
- Mac OS X
- Adobe Connect
- BlueJeans
- Cisco Jabber
- Cisco WebEx
- Easy Meeting
- Facetime
- Fuzebox
- Google Hangout
- GoToMeeting
- Lifesize
- Microsoft Lync
- Polycom RealPresence
- Radavision
- Spontania
- Skype
- TurboMeeting.US
- Vidyo
- Vsee
- Zoom.US

Features

- 30X Optical Zoom
- USB 3.0
- RS-232
- 1920 x 1080
- 63° Field of View
- Up to 30fps
- 64 Presets
- IR Remote
- Certified SONY Lens

HuddleCamHD

The HuddleCamHD 30X is ideal for a large to auditorium sized meeting rooms. Comes standard with certified SONY lens.



- 1. Lens**
30x Optical Zoom.
- 2. IR Receiver**
To receive IR remote controller signal.
- 3. Power LED**
Blue LED blinks when unit is powered,
- 4. Standby LED**
Orange LED blinks for Stand-By status. Blue LED for Working status.

- 5. IR Receiver**
To receive IR remote controller signals.
- 6. USB 3.0 Interface**
For connection to PC USB 3.0 port (also compatible with USB 2.0 port and driver).
- 7. IR Selective Switch**
When using only one remote to control more than one camera, this switch will assign a unique ID to each camera .

- 8. VISCA IN Port**
For hard wired remote control from a 3rd party PC, joystick, etc...
- 9. VISCA OUT Port/RS485**
Used for daisy chaining multiple cameras for RS-232 RS-485 control.
- 10. DC IN 12V Socket**
Only use the Power Adapter supplied with this camera.
- 11. Power Switch**
Power On/Off button.



Specifications

| Camera & Lens | |
|-------------------|--|
| Video CMOS Sensor | 1/2.8" CMOS 3.27 Mega Pixel |
| Frame Rate | 30fps 1920 x 1080p, 60fps 1280 x 720p |
| Lens Zoom | 30X Optical Zoom, 12X Digital Zoom f=4.6-138.3 |
| Field of View | 3°~63° |
| Min Lux | 1.4 Lux |
| White Balance | Auto/Sunlight/Shade/Fluorescence White Balance |

| What's in the Box | |
|--|--|
| 30X Zoom USB 3.0 Camera | |
| 12V/2.0A DC Power Adapter | |
| Installation Bracket & Screw | |
| USB 3.0 Data Cable (9ft) Serial Control Cable, RS-232C to RS-485 Cable | |
| IR Remote Control | |
| User Manual | |

Pan/Tilt Movement

| | |
|---------------|------------|
| Pan Movement | 0-355° |
| Tilt Rotation | + 125° |
| Presets | 64 Presets |

Rear Board Connectors

| | |
|-----------------------------|--|
| High Definition Interface | USB 3.0 |
| Controller Signal Interface | Mini DIN-8 (VISCA IN, VISCA OUT/RS485) |
| Controller Signal Config. | IDip-Switch Pin 7/TTL Signal |
| Baud Rate | 9600 bds |
| Power Supply Interface | DC 12V 2A |


Electrical Index

| | |
|----------------------|----------------------|
| Power Supply Adapter | 12V DC 2A |
| Input Voltage | 12V DC (10.5-14V DC) |
| Input Power | 24W (Max) |

Physical

| | |
|---------------------------|--|
| Material | Aluminum, Plastic |
| Dimensions (W x H x D) mm | 5.68"W x 5.63"H x 5.88"D (7" Height Ext) 144mm x 142mm x 149mm (177mm Height Ext) |
| Camera Weight | 2.52 lbs (1.14 kg) |
| Box Dimensions | 13.25"x9.25"x9.5" (336mm x 234mm x 241mm) |
| Boxed Weight | 5.8 lbs 2.63 kg |
| Temperature | 32°F to + 113°F |
| Color | Silver Gray |

Remote Contol

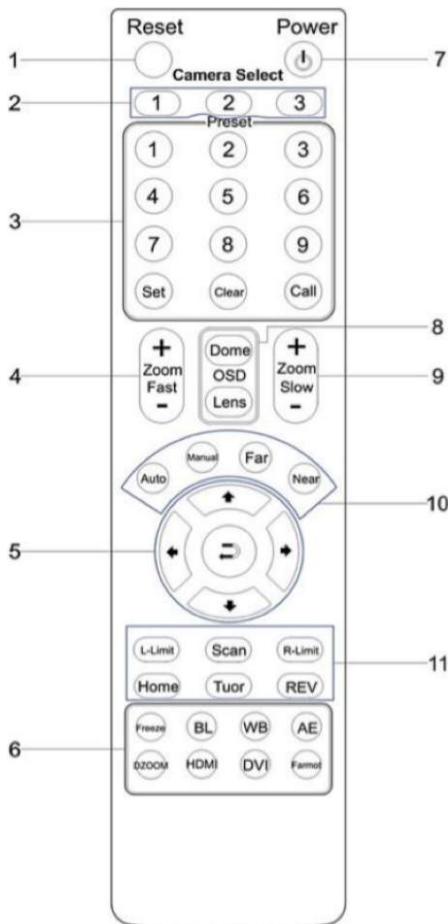

- Reset**
Restarts the camera and restores it to Factory Default settings. (Note: Will delete all memory).
- Camera Selection**
Select Camera ID: 1, 2 or 3
- Preset Positions**
1-9: Preset Positions
Set: Setting Preset Position
Clear: Clear Preset Position
Call: Call Preset Position
Note: If you want to set (or call) the first preset position to 1, you should press number key "1", then press "Set" (or "Call") to set (call) the position.
- Fast Zoom in/out Control Zone**
+ : Zoom in quickly
- : Zoom out quickly
- Pan/Tilt Controller**
 - ↑ Move Up
 - ↓ Move Down
 - ← Move Left
 - Move Right
 - ↺ Auto Pan
- Additional Function Zone**
Freeze: Image Freeze
BL: Back-light Compensation
WB: White Balance
AE: Auto Exposure
D Zoom: Digital Zoom
HDMI: Swap to HDMI video output
DVI: Swap to DVI video output
Format: Swap between different formats
- Power Supply Switch**
Switch for turning camera on (i.e. Stand-By mode vs. Working mode)
- OSD Menu Zone**
Dome OSD: Enter Pan Tilt Zoom OSD menu
Lens OSD: Enter lens OSD menu
- Slow Zoom In/Out Zone**
+ : Zoom in slowly
- : Zoom out slowly
- Focus Control Zone**
Auto: Turn on auto focus
Manual: Turn on manual focus
Far: Set focus at farther distance
Near: Set focus at nearer distance
- Pan/Tilt Function Zone**
L-Limit: Set left boundary limit scanning position
Scan: Enable Boundary Scanning (Auto Panning)
R-Limit: Set right boundary limit scanning position
Home: Go to camera's Home position
Tour: Enable automatic patrol tour of presets
Rev: Enable image flip for ceiling mounting

Still have questions?
Give us a call.