

## HCM-2

### Camera Wall Mount - Large Base Set Up Guide



## What's included

- 1) Qty 1 - Small Wall Mount
- 2) Qty 1 - 1/4 20 x 3/8"
- 3) Qty 2 - 1/4" washer
- 4) Qty 4 - #10 x 1 1/4" screws
- 5) Qty 4 - #10-12 x 1" conical plastic anchors
- 6) Qty 4 - #6-32 x 1" screws
- 7) Qty 4 - #6 washers





152 Robbins Rd, Downingtown, PA, 19335, USA - [HuddleCamHD.com](http://HuddleCamHD.com) | 1 800 - 486-5276

## **STEP 1.**

### **For masonry or drywall wall:**

Position on wall and mark wall for anchor placement. Pre-drill 1/4" holes, minimum 1" deep.

### **For double gang electrical box:**

Position over box with slots overlaying device mounting holes in box.

## **STEP 2.**

### **For masonry or drywall wall:**

Place included anchors in wall and mount to anchors using included #10 screws.

### **For double gang electrical box:**


Mount to box using #6 screws and washers provided.

## **STEP 3.**

Drill hole in wall through rear exit opening for cable access, or use base exit opening.

## **STEP 4.**

Mount camera to mount with included 1/4-20 screw. Utilize (0, 1 or 2) 1/4 washers as required, depending upon depth of threaded insert in base of the camera, in order to achieve a snug fit. Connect all cables.

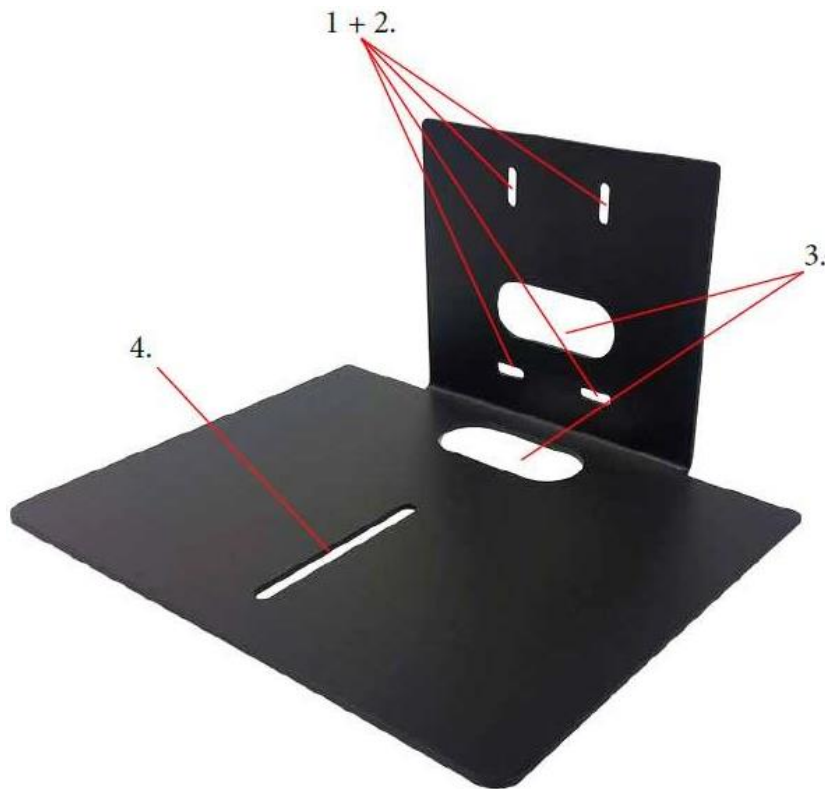

### Mount Compatibility:

- HC12X-HUDDLEVIEW
- HC20X-SIMPLTRACK2
- Generation 1 USB 3.0 HuddleCamHD cameras
- Most large based SONY, Panasonic, Cisco, Polycom, Vaddio, etc. cameras with a 1/4-20 mounting hole.