


HuddleCamHD 10X Gen3 Conferencing Camera

The HuddleCamHD 10X is ideal for small to medium sized meeting rooms. Comes standard with a certified SONY lens.

Model Number:
HC10X-GY-G3 (Black)
HC10X-WH-G3(White)
<https://huddlecamhd.com/10x-q3/>

KEY FEATURES

- 10X Optical Zoom
- USB 3.0 (requires quad-core processor)
- USB 2.0 (Reduced FPS)
- RS-232
- 1920 x 1080
- 61° Field of View
- Up to 30 fps
- 64 Presets
- IR Remote

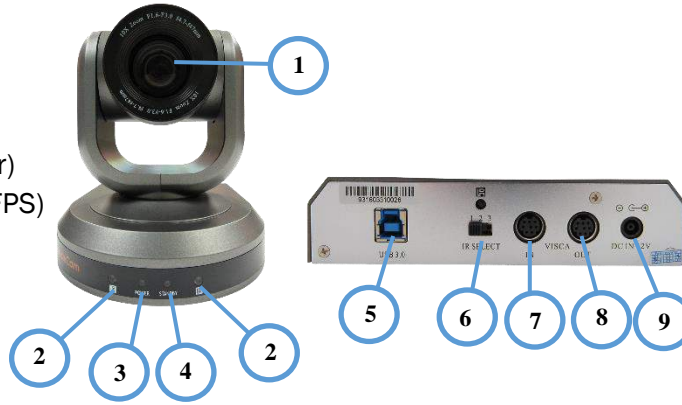

WHAT'S IN THE BOX

- 10X Zoom USB 3.0 Camera
- 12V/2.0A DC Power Adapter
- Installation Bracket & Screw
- USB 3.0 Data Cable (3m)
- Serial Control Cable
- RS-232C to RS-485 Adaptor
- IR Remote Control
- User Manual
(also available online)



- 1. Lens**
10x Optical Zoom
- 2. IR Receiver**
To receive IR remote controller signal
- 3. Power LED**
Blue LED lights when unit is powered and is dark in standby mode.

- 4. Standby LED**
Orange LED blinks for Stand-By status
- 5. USB 3.0 Interface**
For connection to PC USB 3.0 port (also compatible w/ USB 2.0 port & driver)
- 6. IR Select Switch**
Control up to 3 cameras through a single IR remote

- 7. VISCA IN Port**
Used for connecting hard-wired joystick for camera control
- 8. VISCA OUT Port/RS-485**
Used for daisy chaining multiple units in a succession with a hard wired joystick for camera control
- 9. DC In 12V Socket**
Only use the power adapter supplied with this camera


Image Sensor & Lens	
Video CMOS Sensor	1/2.8" CMOS, 2.1 Mega Pixel
Resolution	1080p-30/25, 720p-30/25
Frame Rate	up to 30fps (MJPEG)
Lens Zoom	10X Optical Zoom f=4.7-47mm
Field of View	8° (tele) to 61° (wide)
Pan/Tilt Movement	
Pan Movement	±340°
Tilt Rotation	Up: 90°, Down: 30°
Presets	64 Presets
Electrical Index	
Power Supply Adapter	12V DC 2A
Input Voltage	12V DC (10.5-14V DC)
Input Power	24W (Max)
Working Environment	Indoor
Other	
Mfg. Warranty	2 Years Parts & Labor

Physical	
Material	Aluminum, Plastic
Dimensions (in.)	5.7W x 6.3H x 6.0D (7.4H max w/ tilt)
Dimensions (mm)	145 x 160 x 151 (188H max w/ tilt)
Weight	2.4 lbs (1.1 kg)
Box Dimensions	12.1"W x 9.5"H x 9.6"D (307mm x 241mm x 244mm)
Boxed Weight	5.6 lbs (2.54 kg)
Operating Temperature	32°F to 113°F (0°C to 45°C)
Colors	Gray, White
Rear Board Connectors	
Video Interface	USB 3.0
Controller Signal Interface	Mini DIN-8 (VISCA IN/OUT, PELCO-D IN/OUT)
Controller Signal Config.	Dip-Switch Pin 6/TTL Signal
Baud Rate	9600 bps
Power Supply Interface	DC 12V 2A
Quality Management System	
QMS	Certified ISO9001: 2008

Compatibility

- | | | | |
|----------------------|-----------------------------|-------------------------|--|
| • Windows 7/8/8.1/10 | • Easy Meeting | • Polycom Real Presence | • Google Hangouts on Air |
| • Mac OSX | • Facetime | • Radavision | • YouTube Live |
| • Acano | • Fuzebox | • Spontania | • Any app that supports the UVC camera interface |
| • Adobe Connect | • Google Hangouts | • Skype | |
| • Blue Jeans | • GoToMeeting | • TurboMeeting US | |
| • Cisco Jabber | • Lifesize | • Vidyo | *These apps do not support Image Flip |
| • Cisco Webex* | • Skype for Business (Lync) | • Zoom.US | |



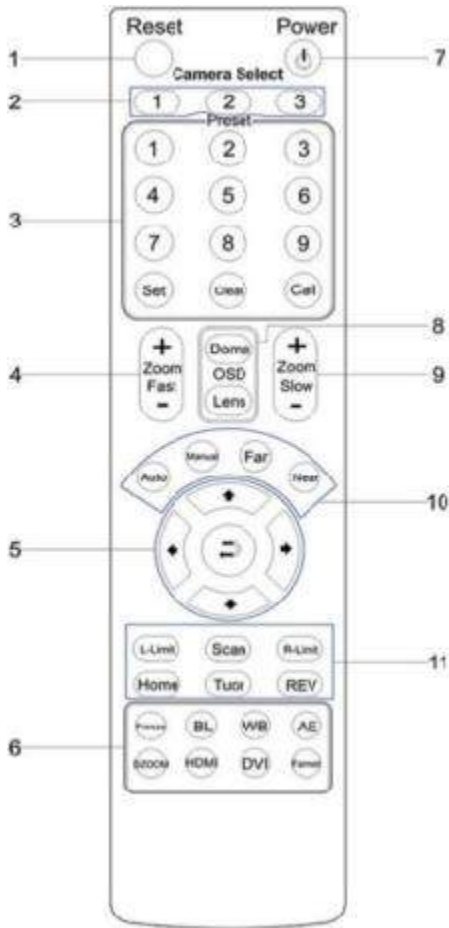







IR Remote Control Functionality






1. **Reset**
Restarts the camera and restores it to Factory Default settings. (Note: Will delete all saved settings and presets.)
2. **Camera Selection**
Select which Camera to control via IR: 1, 2 or 3
3. **Preset Positions**
1-9: Preset Positions
Set: Set a Preset Position
Clear: Clear a Preset Position
Call: Call a Preset Position
Note: If you want to set (or call) the first preset position to 1, you simply press number key "1", then press "Set" or "Call" to set (call) the position.
4. **Fast Zoom In/Out Control Zone**
+: Zoom In quickly
-: Zoom Out quickly
5. **Pan/Tilt Controller**
↑ Tilt Up
↓ Tilt Down
← Pan Left
→ Pan Right
↻ Auto Pan (through Full pan range)
6. **Additional Function Zone**
Model Dependent Functions
Not applicable to this model
7. **Power Supply Switch**
Switch for turning camera on/off (i.e. Working mode vs. Stand-By mode)
8. **OSD Menu Zone**
Model Dependent Functions
Not applicable to this model
9. **Slow Zoom In/Out Control Zone**
+: Zoom In slowly
-: Zoom Out slowly
10. **Focus Control Zone**
Auto: Turn on Auto Focus
Manual: Turn on Manual Focus
Far: Set focus at a farther distance (requires Manual Focus)
Near: Set focus at a nearer distance (requires Manual Focus)
11. **Pan/Tilt Function Zone**
Home: Go to camera's Home position
Rev: Enable image flip for ceiling mounting
L-Limit: Sets left limit for Scan feature
R-Limit: Sets right limit for Scan feature
Scan: Auto pan to L&R limits
Tour: Auto tour of all saved presets











Product Line

	HC3X-BK-G2		HC3X-WH-G2	3X optical zoom, 36-74° HFOV, USB 2.0 video up to 1080p-30
	HC3XA-BK		HC3XA-WH	3X opt zoom w/Built-in Dual Mic Array, 36-74° HFOV, USB 2.0, 1080p-30
	HC10X-720-BK		HC10X-720-WH	10X optical zoom, 7-57° HFOV, USB 2.0 video up to 720p-30
	HC3XW-GY-G2		HC3XW-WH-G2	3X optical zoom, 23-90° HFOV, USB 3.0 video up to 1080p-30
	HC10X-GY-G3		HC10X-WH-G3	10X optical zoom, 8-61° HFOV, USB 3.0 video up to 1080p-30
	HC20X-GY-G2		HC20X-WH-G2	20X optical zoom, 5-58° HFOV, USB 3.0 video up to 1080p-30
	HC30X-GY-G2		HC30X-WH-G2	30X optical zoom, 4-63° HFOV, USB 3.0 video up to 1080p-30






Control Accessories

	HC-JOY-G2	RS232, RS485, RS422, 3D Joystick and Keyboard, VISCA, Pelco-P, Pelco-D
	DB9M-F-xx	Extension Cable, DB9M-F, Plenum, 4 lengths shown in ft. (xx=25, 50, 75, 100)
	VISCA-xx	Daisy Chain Cable, miniDIN8-MM, 4 lengths shown in ft. (xx=25, 50, 75, 100)

Mounting Accessories

	HCM-1-BK		HCM-1-WH	Small Wall Mount, mounts directly to wall or box with supplied hardware
	HCM-2-BK		HCM-2-WH	Large Wall Mount, mounts directly to wall or box with supplied hardware
	HCM-1C-WH			Small Open Ceiling Mount, mounts to 1"NPT pipe
	HCM-2C-WH			Large Open Base Ceiling Mount, mounts to 1"NPT pipe
	PT-CM-1-BK		PT-CM-1-WH	Surface Ceiling Mount, mounts directly to ceiling or box w/ suppl. hardware

Conference Audio

	HP-AIR-BK		HP-AIR-WH	Wireless Speakerphone with USB receiver
	HP-AIR-BA-BK			Wireless Speakerphone with USB receiver and external amplifier feed
	HC3XA-BK		HC3XA-WH	3X opt zoom w/Built-in Dual Mic Array, 36-74° HFOV, USB 2.0, 1080p-30

