


HuddleCamHD SimplTrack Auto Tracking Camera Solution

The HuddleCamHD SimplTrack is your simple auto tracking solution for professional presentations to education

Model Numbers:
HC-SIMPLTRACK-CM (Ceiling Mount version)
HC-SIMPLTRACK-TP (Tripod version)
<http://huddlecamhd.com/simpltrack/>

KEY FEATURES

- 20X Optical Zoom
- Motion & Facial Tracking
- RTSP / RTMP Streaming
- 3G-SDI / USB3 Output
- 1080@60 SDI Feed
- 1080@30 IP Feed
- 64GB Internal Storage
- 59° Field of View
- Software Interface

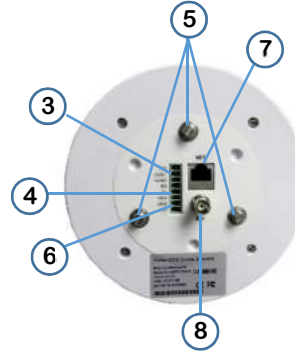

WHAT'S IN THE BOX

- SimplTrack Camera
- Power Supply
- 25' 3G-SDI Cable
- 3G-SDI to USB3 Framegrabber
- (-TP) Tripod & Column Adapter
- (-CM) Ceiling Mount & Adapter
- Manual



1. Tracking Lens

20x Optical Zoom

2. Reference Lens

78° HFoV

3. Audio Input

Phoenix Connector

4. VISCA Control

For hard wired remote control

5. Locking Studs

Securely connect to ceiling and tripod adapter columns

6. Power (12VDC)

Use Power Adapter supplied with camera

7. Network Connection

10/100

8. 3G-SDI Output

Provides up to a 1080P@60 feed

Tracking Camera Image Sensor & Lens

Video Sensor	1/2.8" EXMOR, 2.14 Mega Pixel
Frame Rate	60fps @ 1920x1080P
Lens Zoom	20X Optical, f=4.7-94mm
Field of View	3° (tele) to 59° (wide) Horizontal
Min Lux	0.5

Reference Camera Image Sensor & Lens

Video Sensor	1/2.8" EXMOR, 2.14 Mega Pixel
Field of View	78° (Horizontal) x 44° (Vertical)
Lens	2.4mm

Pan/Tilt Movement

Pan Movement	±170°
Pan Speed	0.1° to 120°/s
Tilt Rotation	+ 90° to -30°
Tilt Speed	0.1° to 90° /s
Presets	256 Presets

Electrical Index

Power Supply	12V DC 2.5A
Input Power	20W (Max)

Physical

Material	Aluminum, Plastic
Base Diameter	6.3" (160.0mm)
Height	8.7" (220.0mm)
Weight	3.92 lbs (1.78 kg)
Working Environment	Indoor
Operating Temperature	32°F to 104°F (0°C to 40°C)
Storage Temperature	-4°F to 140°F (-20°C to 60°C)
Color	White

Bottom Board Connectors

HD Video Interface	3G-SDI / USB 3.0
Controller Signal Interface	Phoenix Connector (VISCA IN)
Audio Input Interface	Phoenix Connector
Network	10/100
Power Supply Interface	DC 12V 2.5A (Phoenix Connector)

Warranty

Mfg. Warranty	1 Years Parts & Labor
---------------	-----------------------