

HuddleCamHD Webcam


Conferencing Webcam

Model Number:
HC-WEBCAM-120
<https://huddlecamed.com/webcam/>

The HuddleCamHD webcam is an easy to use, Plug-and-Play camera with USB 2.0 connectivity & power.

KEY FEATURES

- Plug & Play USB power
- USB 2.0
- 1920 x 1080
- 120° Field of View
- Up to 30 fps
- OSD Menu Software

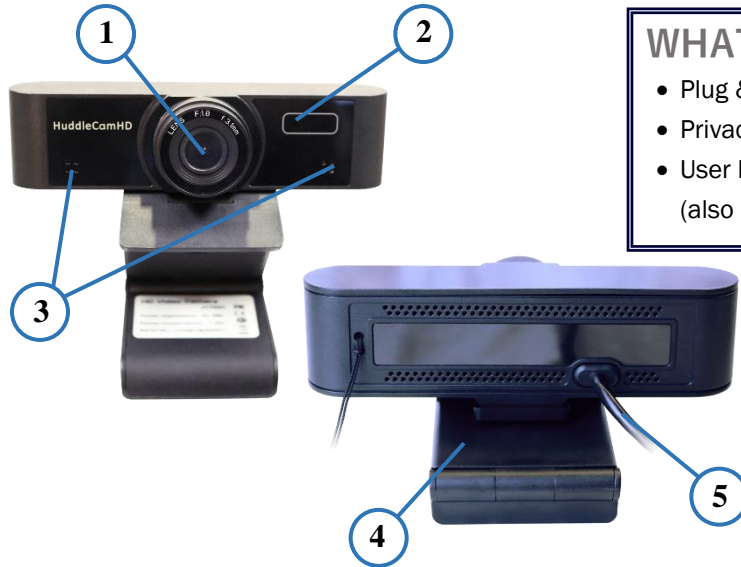

WHAT'S IN THE BOX

- Plug & Play Webcam
- Privacy cover
- User Manual
(also available online)



- 1. Lens**
120° Field of View lens
- 4. Mounting Base**
To mount camera to monitor or 1/4 20 screw

- 2. LED Indicator**
LED is illuminated during use
- 5. USB 2.0 Cable**
For connection to PC USB 2.0 port

- 3. Microphone Array**
Beamforming microphones for high quality pickup

| Image Sensor & Lens | |
|-------------------------|------------------------------|
| Video CMOS Sensor | 1/2.7" CMOS, 2.07 Mega Pixel |
| Resolution | 1080p-30/25, 720p-30/25 |
| Frame Rate | up to 30fps (MJPEG) |
| Lens | Focus: f=3.1mm |
| Field of View | 120° |
| Min. Illumination | 0.05 Lux @ (F1.8, AGC ON) |
| Digital Noise Reduction | 2D, 3D DNR |
| Electrical Index | |
| Input Voltage | 5V (USB Power) |
| Current Consumption | 270mA |
| Power Consumption | 1.4W |
| Working Environment | Indoor |

| Physical Specifications | |
|-------------------------|---|
| Material | Plastic |
| Dimensions (in.) | 4.6"W x 1.5"H x 1.2"D (not including bracket) |
| Dimensions (mm) | 118 x 37.2 x 30.8 (not including bracket) |
| Weight | 0.36 lbs (0.16 kg) |
| Box Dimensions | 5.4"W x 3.1"H x 3.0"D (137mm x 79mm x 76mm) |
| Boxed Weight | 0.4 lbs (0.18 kg) |
| Operating Temperature | 14°F to 104°F (-10°C to 40°C) |
| Storage Temperature | -40°F to 140°F (-40°C to 60°C) |
| Rear Board Connectors | |
| Video/Power Interface | USB 2.0 |
| Other | |
| Mfg. Warranty | 3 Years Parts & Labor |