

Introducing the Video Collaboration Solution Team Kit

This entry level web conference kit includes equipment for high quality video conferencing and collaboration for small teams.

MSRP: \$2,024

SKU: HC-TEAMPLUS-VCS-G2-NOPC











Collaboration



Integration



Installation Ready

WHAT'S INCLUDED

Included with every HuddleCamHD Team+ Kit includes a 1080p 10X optical zoom USB conference camera and a HuddlePod Air Microphone / Speaker combo.

Quick Launch PE is a meeting room dashboard software allowing your team to customize the meeting room experience and lock down the Intel NUC.

QUICK **LAUNCH**



152 Robbins Rd, Downingtown, PA USA www.HuddleCamHD.com





PC RECOMMENDATION DELL OPTIPLEX 3070

Details	
Computer	i5 processor, 256 GB SSD, 8GB
Operating System	Windows 10
Camera	10X Optical Zoom 1080p Camera
Microphone	HuddlePod Air
Wall Mount	Included (camera & computer)
Cabling	6' HDMI Cable
Additional	Microsoft Wireless Keyboard/Mouse

^{*} PC, LCD, & LCD mount not included with system.

ONE SYSTEM FOR ANY SOFTWARE

Quicklaunch is an easy-to-use multi-platform, one-click/one-touch application to join meetings, start applications, access data, play media, showcase your organization's content and business intelligence assets. It's included in both of our VCS kits for a easy to manage conference space.

QUICKLAUNCH BENEFITS



Enhance Productivity

- Simplify the complicated collaboration experience with easy to use "one click" application launching.
- Customize your meeting workspace
- Consistant and easy user experience
- Use in open or locked down modes.



Open Platform

- Easy integration with the leading video conferencing software including: Bluejeans, Vidyo, Skype and GoToMeeting.
- Easily switch between the persistent toolbar and desktop view with customized and tiered buttons
- Always in the state you expect with your organization's look and feel.



Safe, Secure & Manageable

- For IT departments, it reduces training and support cost by providing a secure and manageable interface.
- Keep your confidential data secure with the 'Room Reset' feature
- Optional 'lock-down' mode to restrict usage of your Quicklaunch device and protect it against unwanted changes.

HuddleCamHD 10X Gen3

Conferencing Camera

The HuddleCamHD 10X is ideal for small to medium sized meeting rooms. Comes standard with a certified SONY lens.

Model Number: HC10X-GY-G3 (Black) HC10X-WH-G3(White) https://huddlecamhd.com /10x-q3/

KEY FEATURES

- 10X Optical Zoom
- USB 3.0 (requires quad-core processor)
- USB 2.0 (Reduced FPS)
- RS-232
- 1920 x 1080
- 61° Field of View
- Up to 30 fps
- 64 Presets
- IR Remote



WHAT'S IN THE BOX

- 10X Zoom USB 3.0 Camera
- 12V/2.0A DC Power Adapter
- Installation Bracket & Screw
- USB 3.0 Data Cable (3m)
- Serial Control Cable
- _______
- RS-232C to RS-485 Adaptor
- IR Remote Control
- User Manual (also available online)



1. Lens

10x Optical Zoom

2. IR Receiver

To receive IR remote controller signal

3. Power LED

Blue LED lights when unit is powered and is dark in standby mode.

4. Standby LED

Orange LED blinks for Stand-By status

5. USB 3.0 Interface

For connection to PC USB 3.0 port (also compatible w/ USB 2.0 port & driver)

6. IR Select Switch

Control up to 3 cameras through a single IR remote

7. VISCA IN Port

Used for connecting hard-wired joystick for camera control

8. VISCA OUT Port/RS-485

Used for daisy chaining multiple units in a succession with a hard wired joystick for camera control

9. DC In 12V Socket

Only use the power adapter supplied with this camera

1/2.8" CMOS, 2.1 Mega Pixel
1080p-30/25, 720p-30/25
up to 30fps (MJPEG)
10X Optical Zoom f=4.7-47mm
8° (tele) to 61° (wide)
±340°
Up: 90°, Down: 30°
64 Presets
12V DC 2A
12V DC (10.5-14V DC)
24W (Max)
Indoor
2 Years Parts & Labor

Physical	
Material	Aluminum, Plastic
Dimensions (in.)	5.7W x 6.3H x 6.0D (7.4H max w/ tilt)
Dimensions (mm)	145 x 160 x 151 (188H max w/ tilt)
Weight	2.4 lbs (1.1 kg)
Box Dimensions	12.1"W x 9.5"H x 9.6"D (307mm x 241mm x 244mm)
Boxed Weight	5.6 lbs (2.54 kg)
Operating Temperature	32°F to 113°F (0°C to 45°C)
Colors	Gray, White
Rear Board Connectors	
Video Interface	USB 3.0
Controller Signal Interface	Mini DIN-8 (VISCA IN/OUT, PELCO-D IN/OUT)
Controller Signal Config.	Dip-Switch Pin 6/TTL Signal
Baud Rate	9600 bps
Power Supply Interface	DC 12V 2A
Quality Management System	
QMS	Certified ISO9001: 2008


Compatibility

- Windows 7/8/8.1/10
- Mac OSX
- Acano
- Adobe Connect
- Blue Jeans
- Cisco Jabber
- Cisco Webex*

- Easy Meeting
- Facetime
- Fuzebox
- Google Hangouts
- GoToMeeting
- Lifesize
- Skype for Business (Lync)
- Polycom Real Presence
- Radavision
- Spontania
- Skype
- TurboMeeting US
- Vidyo
- Zoom.US

- Google Hangouts on Air
- YouTube Live
- Any app that supports the UVC camera interface
- *These apps do not support Image Flip

IR Remote Control Functionality

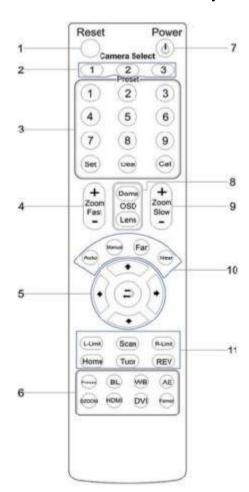

1. Reset

Restarts the camera and restores it to Factory Default settings. (Note: Will delete all saved settings and presets.)

2. Camera Selection

Select which Camera to control via IR: 1, 2 or 3

3. Preset Positions

1-9: Preset Positions
Set: Set a Preset Position
Clear: Clear a Preset Position
Call: Call a Preset Position
Note: If you want to set (or call)
the first preset position to 1, you
simply press number key "1", then
press "Set" or "Call" to set (call)
the position.

4. Fast Zoom In/Out Control Zone

- +: Zoom In quickly
- -: Zoom Out quickly

5. Pan/Tilt Controller

- Tilt Up
- Tilt Down
- 🖛 Pan Left
- Pan Right
- Auto Pan (through Full pan range)

6. Additional Function Zone

Model Dependent Functions Not applicable to this model

7. Power Supply Switch

Switch for turning camera on/off (i.e. Working mode vs. Stand-By mode)

8. OSD Menu Zone

Model Dependent Functions Not applicable to this model

9. Slow Zoom In/Out Control Zone

>

- +: Zoom In slowly
- -: Zoom Out slowly

10. Focus Control Zone

Auto: Turn on Auto Focus Manual: Turn on Manual Focus Far: Set focus at a farther distance (requires Manual Focus) Near: Set focus at a nearer distance (requires Manual Focus)

11. Pan/Tilt Function Zone

Home: Go to camera's Home position
Rev: Enable image flip for ceiling mounting
L-Limit: Sets left limit for Scan feature

R-Limit: Sets right limit for Scan feature

Scan: Auto pan to L&R limits Tour: Auto tour of all saved presets

HuddlePod Air Wireless Speakerphone

DATA SHEET

HP-AIR-WH



Model Number: HP-AIR-BK

Compatibility

- Windows 7/8.1/10
- Mac OS X
- Acano
- Adobe Connect
- BlueJeans
- Cisco Jabber
- Cisco WebEx
- Easymeeting
- Facetime
- Fuzebox
- Google Hangouts
- GoToMeeting
- Lifesize
- Skype for Business(Lync)
- Polycom RealPresence
- Radavision
- Spontania
- Skype
- TurboMeeting.US
- Vidyo
- VSee
- Zoom.US
- Google Hangouts on Air
- YouTube Live

What's in the Box

HuddlePod Air Speakerphone
Wireless Receiver & Antenna
Neoprene Travel Case
User Manual
USB 2.0 Cable (charge & power)
USB Charger

Features

- 2.4 GHz Wireless
- Echo Cancellation
- Noise Cancellation
- 360° omnidirectional pickup
- Full Duplex
- Easy to use
- Auto Level Control
- Neoprene Travel Case

The HuddlePod Air is the ideal wireless speakerphone with an easy & reliable wireless connection.





- Power LEDsBlue power on
- 2. Speaker LED
 Solid Blue: Mute
 Blinking Blue: Max Volume
- 3. Volume Mute

 Mute speakerphone

 volume
- 4. Power
 Turn speakerphone
 on/off
- 5. Volume Up/Down
 Controls speaker volume
- 6. Mute Microphone Mutes microphone
- 7. Mic LED
 Blue: Muted
 Blinking Orange: Low battery
 Solid Orange: Full charge
- 8. USB 2.0 Plug
 For power and charging
- 3.5mm Audio Jack
 For connected headphones or similar devices
- 10. Durable Wireless Receiver In protective plastic case

Specifications

Microphone Features		Wireless Speakerphone Specifications	
Echo Cancellation	256 ms echo cancellation	Weight	0.8 lbs. (0.36 kg)
Audio Output	1/8" TRS headphone	Size	7" diameter, 1.5" height (177mm diameter, 38mm height
Noise Cancellation	Intelligent NC up to 16db	Working Environment	Temp 0~40°C, Humidity 20%~85%
Digital Equalizer	Built-in Digital EQ for stable audio	Compatibility	MS WIN 7/8.1/10, Mac 10.5+, Android 4.4+
Battery Life	6-8 Hours, 4-5 hour charge time	RF Frequency Range	2.400 GHz ~ 2.4835 GHz
Warranty	3 Years	Certifications	CE Mark (R & TTE Directive)





All-in-One Media Keyboard

The All-in-One Media Keyboard has a full-sized keyset and an integrated multi-touch trackpad. Type, swipe, drag, zoom, and click with ease. It has customizable media hotkeys that put the web and your favorite music, photos, and movies at your fingertips. The keyboard also has a durable liquid resistant design.

Key Features

- 1. Integrated multi-touch trackpad
- 2. Customizable media hotkeys
- 3. Easy access volume controls
- **4.** Durable spill and drop resistant design
- 5. Wireless connectivity (USB)
- 6. Advanced Encryption Standard (AES) 128-Bit Encryption
- 7. Also works with select TVs and gaming consoles



Performance Parameters
104 key configuration (English North American)
Frequency Range: 2.1 GHz
Power: AAA alkaline batteries (included)
Battery Life: 9 months (typical)
Compliance: FCC Class B, ROHS, REACH
Encryption AES:

This keyboard features Advanced Encryption Standard (AES*) technology, which is designed to help protect your information by encrypting your keystrokes. Each keyboard is permanently paired with its receiver at the factory – no key information is ever shared over the air.

Warranty	J
----------	---

1-year manufacturer's warranty

Physical Parameters	
Keyboard L x W x H (in.)	14.4 x 5.2 x 0.76
Keyboard L x W x H (mm)	367 x 132 x 19.4
Keyboard Weight	15.3 oz (434g)
Transceiver L x W x H (in.)	0.76 × 0.51 × 0.17
Transceiver L x W x H (mm)	18.3 × 13.1 × 4.4
Transceiver Weight	0.05 oz (1.5g)

Compatibility

Operating Systems: Windows, Linux, Mac OS

Select USB HID compliant Smart TVs and gaming consoles

Wireless Connection

Up to 33 ft. (10m) range

HuddleCamHD

Small Universal Wall Mount


HuddleCamHD


Features

- Mounts directly to wall with supplied hardware
- Black or White powder coat finish provides long lasting durability
- Universally compatible with all center mount cameras
- · Mounting hardware included
- 3-year warranty

Compatibility

All small based HuddleCamHD cameras





Model Number: HCM-1-BK / HCM-1-WH

This Universal Thin Profile Wall Mount was designed specifically for an ideal way to wall mount a camera above or below a plasma or LCD monitor. Constructed from heavy gauge steel, this mount comes with a 3-year manufacture warranty.



- **1. Slot for 1/4-20 machine screw** Secures camera to mount
- 2. Mount Base 5 11/16" wide universal metal camera tray
- 3. Cable Access

 Convenient cable access under mount or through wall

4. Wall Mounting HolesPrecut 4 post pattern fits
U.S. doublegang box.



Size & Weigh	t
Dimensions (in.)	5-11/16W x 8-5/16D x 5-1/16H
Dimensions (mm.)	145W x 212D x 129H
Weight	1.9 lbs 0.84 kg

What's in the box	
Camera Mount	
Mounting Hardware:	(4) Mounting Screws & Washers
	(4) Drywall/Masonry Anchors
	(1) Quarter Twenty bolt
	(4) Device mounting screws for 2-Gang Box